


# Cable glands

Polyamide - Metric thread

Material	Housing: PA66 – UL certified, Cable seal: EPDM, O-ring: NBR
Protection	IP 68
Temperature resistance	-40°C to 100°C in static state, instantaneous heat resistance up to 120°C; -20°C to 80°C in dynamic state, instantaneous heat resistance up to 100°C
Color	Light grey (RAL7035)

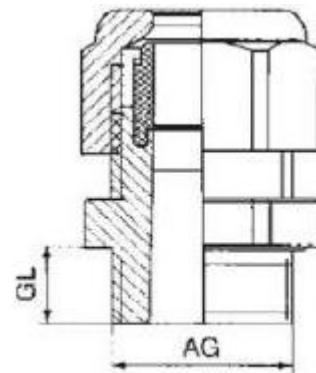

EAN-Nummer	MT Item number	Cable range (mm)	Thread size AG	Thread length (mm) GL	Spanner size (mm)	Packing (pcs/bag)
5705151115102	F-PA-MM12	3-6.5	M12 x 1.5	8	16	100
5705151115591	F-PA-MM16	4-8	M16 x 1.5	8	19	100
5705151115607	F-PA-MM20	5-9	M20 x 1.5	10	24	100
5705151115133	F-PA-MM25	9-16	M25 x 1.5	10	33	50
5705151115614	F-PA-MM32	16-21	M32 x 1.5	11	35	25
5705151115621	F-PA-MM40	22-32	M40 x 1.5	14	52	16
5705151115164	F-PA-MM50	32-38	M50 x 1.5	14	60	9
5705151115171	F-PA-MM63	37-44	M63 x 1.5	15	64	6

